

DAVEY Floodfighter®

GUSHER PUMP

Model Numbers:
G8016 Honda Recoil Start
G8016E Honda Electric Start

GUARANTEE
1 YEAR - Wet end
3 YEARS - Honda engine

APPLICATIONS

Ideal for septic tank pump-out, tank filling, irrigation, water transfer and dewatering.

FEATURES & BENEFITS

Pump

- **Corrosion resistant marine grade aluminium casing, suction and discharge port** for longer life
- **Heavy duty cast iron open impeller and diffuser** to extend pump life when pumping dirty water with some solids content
- **Nitrile rubber seal and casing o-rings** for improved reliability in varying water quality
- **Mechanical shaft seal** for long life
- **Able to self prime from 6m***, for improved versatility
- **Includes powdercoated steel roll frame with anti-vibration mounting** for easy transport

*At 3600rpm, priming may be reduced at lower speeds

Engine

- **High quality Honda GX200 petrol engine**, which has European Community and USA EPA and CARB environmental standards compliance
- **Two stage air cleaner and cast iron sleeved cylinder bore** for long engine life
- **Low oil protection** for operator peace of mind

Starting Options

- **Available with recoil starters** or with electric start with recoil start back-up

Note: Battery and leads not included

Gusher Pumps



MATERIALS OF CONSTRUCTION	
PART	MATERIAL
Suction cover	Aluminium
Diffuser	Cast iron
Impeller	Cast iron
Yoke & casing	Aluminium
Discharge	Aluminium
Casing bolts	Zinc plated steel
Yoke bolts	Stainless steel
Flap valve	Nitrile rubber
Seal ring	Nitrile rubber
Casing o-ring	Nitrile rubber
Mechanical seal	Carbon ceramic


ENGINE SPECIFICATIONS	
Engine Brand	Honda
Engine Model	GX200
Engine Type	Petrol
Engine RPM	3600
Displacement (cc)	196
Fuel Tank (litres)	3.1
Oil Capacity (litres)	0.6
Compression Ratio	8.5:1
Air Filter Type	Dual-Foam / Paper
Spark Arrestor	YES
Approx. fuel consumption @ full load @ 3600rpm	1.7 l/hr
dB(A) @ 7m @ 3600rpm @ full load	79

OPERATING LIMITS	
Max. flow to	1000 lpm
Max. Total Head	32m
Max. Suction Lift	7m
Max. Water Temperature	50°C
Min. Water Temperature	1°C
Min. Suction Pipe Size	3"
Inlet size	3" BSP(M)
Outlet size	3" BSP(M)

INSTALLATION AND PRIMING	
<ul style="list-style-type: none"> Fit strainer to bottom of suction pipe; a foot valve is not required. To prime, fill pump body with water then allow pump to run until drawing water. 	

DIMENSIONS (mm)						
Model	A	B	C	D	E	Weight (kg)
G8016	510	420	455	180	170	29.5*

*Add 1kg for Electric Start engine option.

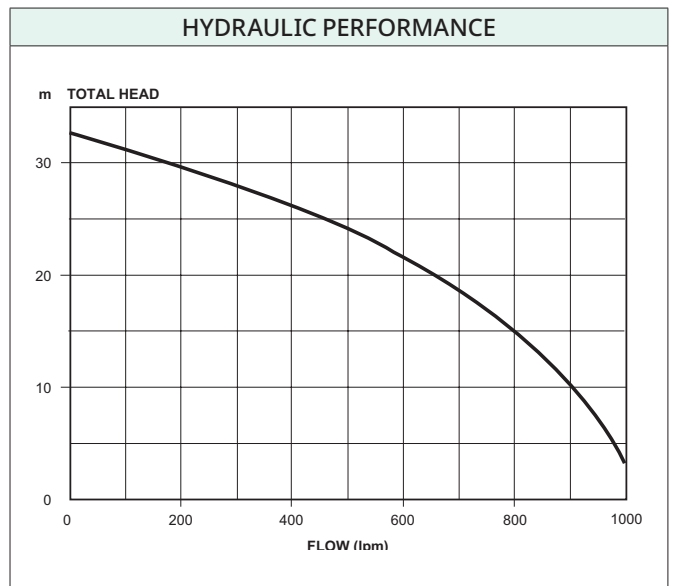

daveywater.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2024.

