



QB2001 to
QB3002



QB035 &
QB1501

DAVEY
SpaPOWER[®]

Model Number:
QB35, QB1501, QB2001, QB2002,
QB2501, QB2502, QB3001, QB3002

GUARANTEE
2 YEARS

APPLICATIONS


Ideal for above and inground spas and swim spas.

SPAPOWER QB SERIES BOOSTER PUMP

FEATURES & BENEFITS

- **Energy Efficient** – Single and two speed models available to help conserve energy during filtration cycles
- **Quiet** – Large suction and discharge outlets allow for higher performance but at lower noise levels, ensuring a powerful yet relaxing spa experience
- **Powerful Pump Performance** – Robust pump design combined with powerful motor options delivers high performance, for a satisfying spa experience
- **Stainless Steel Pump Shaft** – Corrosion resistant 316SS pump shaft to ensure years of trouble-free use, even in salt water spa pool applications, for an extended pump life
- **Flexible Installation** – Pump housing can be turned 180° for easy installation of pipework, horizontal or vertical
- **Enhanced Pump Design** – Shielded yoke design helps protect the motor from any adverse leaking from the wet end whilst still meeting all industry safety standards
- **Double insulated to water circuit** – provided with an Equipotential Bonding Point for AS/NZ 3000 wiring standards

DAVEY SpaPOWER®

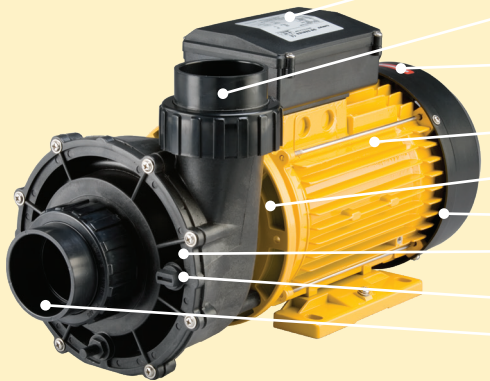

- Metal jacket capacitor** installed for greater dependability and long service life
- Horizontal or vertical discharge** options for flexibility in installation with optional mounting pads to raise the pump height and to further reduce vibration and pump noise
- Option of single or two speed** models offers lower running costs during filtration cycles
- High quality and heavy duty construction** for long service life
- Corrosion resistant 316SS pump shaft**, a great performer even in salt water applications for an extended pump life
- Double insulated to water circuit** with Equipotential Bonding Point
- Powerful pump performance and robust design**. Shielded yoke offers protection from adverse leaking from the wet end.
- Three drainage points** enable easy drainage and clearing of air locks
- Large suction and discharge outlets** offer high performance at lower noise levels

ELECTRICAL DATA


Model	QB035	QB1501	QB2001/AUS	QB2002/AUS	QB2501/AUS	QB2502/AUS	QB3001/AUS	QB3002/AUS
Speed	Single	Single	Single	Two	Single	Two	Single	Two
Voltage	220 - 240V							
Phase	Single							
Supply frequency	50Hz							
Start current	5A	20A	24A	14/22A	34A	19/34A	42A	19/38A
Run current	1.6A	5.8A	7A	2.4/7A	8.6A	2.8/8.6A	10A	3.2/10A
Motor input power	250W	1100W	1500W	350/1500W	1850W	400/1850W	2200W	450/2200W
Motor output power	180W	750W	1100W	180/1100W	1500W	220/1500W	1700W	250/1700W
RPM	2900	2900	2900	1450/2900	2900	1450/2900	2900	1450/2900
Enclosure class	IP55							
Insulation class	F							
Approval no.	A/10EA							
Lead length	3 metres							

AVAILABLE THREAD PLUG TYPE

Model	Thread Type (Available)	Plug Type (Available)
QB035	40mm FBT (Pitch 3.175mm)	Amp (only)
QB1501	50mm FBT (Pitch 3.175mm)	Amp + C38
QB2001AUS, QB2501AUS, QB3001AUS, QB2002AUS, QB2502AUS, QB3002AUS	50mm FBT (Pitch 3.175mm)	Amp + C38
QB2001, QB2501, QB3001, QB2002, QB2502, QB3002	50mm Davey FBT (Pitch 4.23mm)	Amp + C38

DIMENSIONS (mm)


Model	A	B	C	D	E	F	Mounting Holes Dia.	Inlet PVC	Outlet PVC	Net Weight (kg)
QB035	317	191	153	89	32.5	80				5.1
QB1501	402	211	187	120	48	90	8	40	40	11.5
QB2001/AUS										13.5
QB2501/AUS	414	235	202	75	90	125				14.6
QB3001/AUS							10	50	50	15.7
QB2002/AUS										14.7
QB2502/AUS	430	235	202	71	90	125				15.9
QB3002/AUS										17

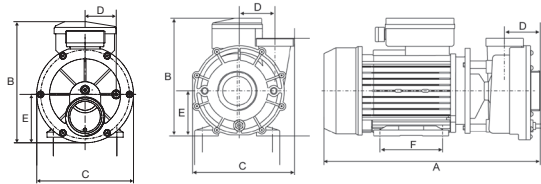

QB035 & QB1501

QB2001 to QB3002

HYDRAULIC PERFORMANCE

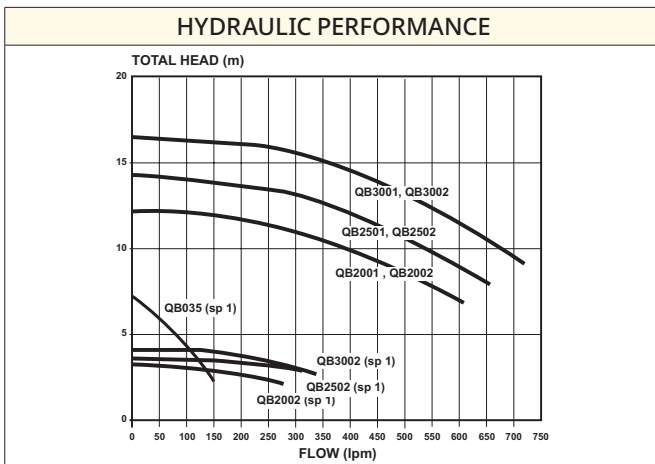

OPERATING LIMITS

Model	QB035	QB1501	QB2001	QB2002	QB2501	QB2502	QB3001	QB3002
Max. water temp	50°C							
Max. ambient temp	50°C							
Noise level (dBa)	56	65	72	55/72	72	55/72	72	55/72



daveywater.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2024.

